


DATASHEET – DIMENSIONS

TELESCOPIC HYDRAULIC TOP LINK STANDARD - CAT. 2 (45-95 HP) 480-811 mm (25,4/25,4 mm)

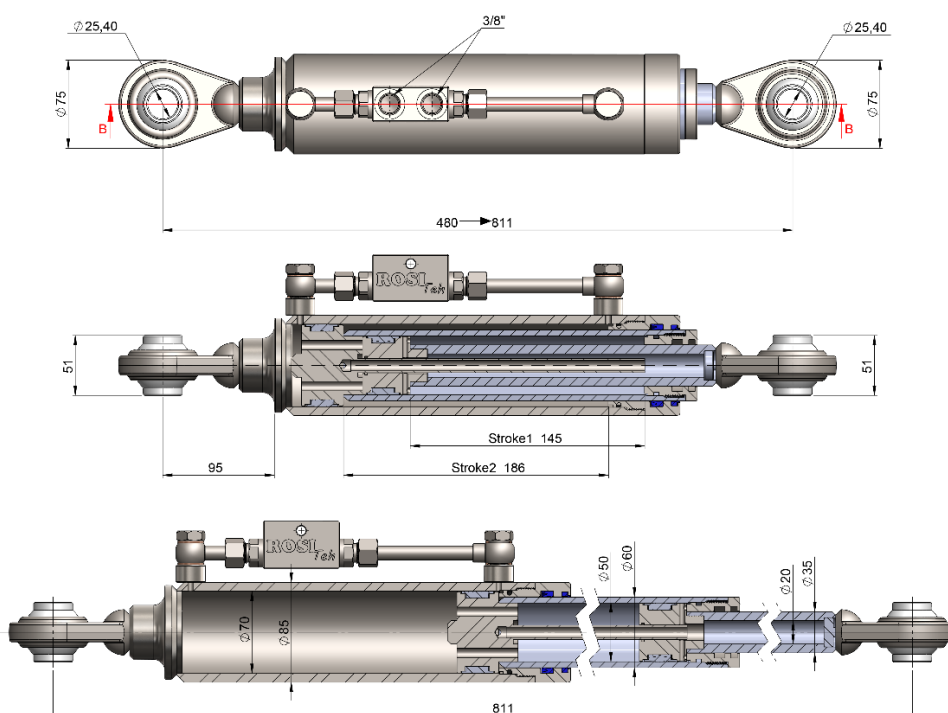

Technical information	
Category:	CAT. 2
Suitable for tractors:	45–95 HP
Hole diameter:	25,4–25,4 mm
Length (min. → max.):	480 → 811 mm
Stroke:	331 mm
Maximum pressure:	180 bar
Connection:	3/8"
Valve block:	Yes
Maximum speed:	0,5 m/s
Cylinder extension force (at 180 bar):	1st stage: 7,05 tons, 2nd stage: 3,6 tons
Cylinder retraction force (at 180 bar):	1st stage: 1,87 tons, 2nd stage: 1,83 tons
Surface protection:	Zinc plating
Product weight:	13 kg